


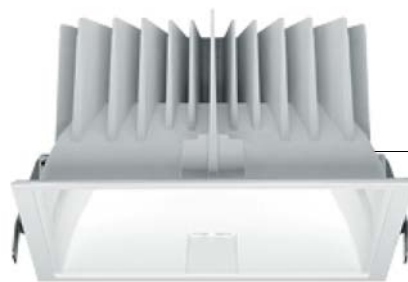
- Downlighters equipped with LED source.
- Reflector with vacuum aluminium vapour metalized finish and anti-scratch protection layer.
- Die-cast aluminium body and passive dissipation system.
- Diameter 212 IP20 (IP23 on optical assembly).
- Diameter 125 IP20 (IP54 on optical assembly).

- Recessed installation with torsion springs for easy fixing on false ceilings with thickness from 1 to 25 mm.
- Class I for \varnothing 212.
- Class II for \varnothing 125.



Springs with exclusive "lock unlock" system

Luminaire removal becomes easy and totally safe to preserve false ceiling integrity (also with fragile panels).



Body and dissipator made of die-cast aluminium



Fortimo LED



Transparent protection screen IP54



Reflector






Customisation rim








Reflector retention system

The springs guarantee resistant fixing, avoiding accidental fall also in areas with stress/vibrations (i.e. underground stations). Moreover, during the works in the building yard, the product can be installed and switched on without reflector. The reflector can be installed at the end of the works to guarantee cleanness.



| round version \varnothing 212 – general lighting | | | | | | |
|---|-------------|------|-------------------------|-------------------------|--------------|---|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
|   | MB52 | 22 | 2000 | DLM neutral white | ELECTRONIC |  GENERAL LIGHTING |
| | MB53 | 24 | | DLM warm white | | |
| | MB54 | 41 | 3000 | DLM neutral white | | |
| | MB55 | 44 | | DLM warm white | | |
| | MB56 | 22 | 2000 | DLM neutral white | DALI | |
| | MB57 | 24 | | DLM warm white | | |
| | MB58 | 41 | 3000 | DLM neutral white | | |
| | MB59 | 44 | | DLM warm white | | |
| | MB60 | 22 | 2000 | DLM neutral white | INVERTER | |
| | MB61 | 24 | | DLM warm white | | |
| | MB62 | 18 | 1100 | DLM TWIST neutral white | ELECTRONIC | |
| | MB63 | 20 | | DLM TWIST warm white | | |
| | MC37 | 24 | 2000 | SLM warm white IRC > 90 | ELECTRONIC | |
| | MC38 | 44 | 3000 | SLM warm white IRC > 90 | | |
| | MC39 | 24 | 2000 | SLM warm white IRC > 90 | DALI | |
| MC40 | 44 | 3000 | SLM warm white IRC > 90 | | | |

| accessories | code | accessories | code |
|---|-------------|---|-------------|
|  Diffusing perimetral side per MB52, MB53, MB54, MB55, MB56, MB57, MB58, MB59, MB62, MB63 | MWR1 |  Diffusing perimetral side IP44 per MB52, MB53, MB54, MB55, MB56, MB57, MB58, MB59, MB62, MB63 | MWR2 |

| square version \varnothing 212 – general lighting | | | | | | |
|---|-------------|------|-------------------------|-------------------------|--------------|---|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
|   | MC05 | 22 | 2000 | DLM neutral white | ELECTRONIC |  GENERAL LIGHTING |
| | MC06 | 24 | | DLM warm white | | |
| | MC41 | 44 | 3000 | DLM neutral white | | |
| | MC08 | 44 | | DLM warm white | | |
| | MC09 | 22 | 2000 | DLM neutral white | DALI | |
| | MC10 | 24 | | DLM warm white | | |
| | MC11 | 41 | 3000 | DLM neutral white | | |
| | MC12 | 44 | | DLM warm white | | |
| | MC13 | 22 | 2000 | DLM neutral white | INVERTER | |
| | MC14 | 24 | | DLM warm white | | |
| | MC15 | 18 | 1100 | DLM TWIST neutral white | ELECTRONIC | |
| | MC16 | 20 | | DLM TWIST warm white | | |
| | MC45 | 24 | 2000 | SLM warm white IRC > 90 | ELECTRONIC | |
| | MC46 | 44 | 3000 | SLM warm white IRC > 90 | | |
| | MC47 | 24 | 2000 | SLM warm white IRC > 90 | DALI | |
| MC48 | 44 | 3000 | SLM warm white IRC > 90 | | | |





| round version ϕ 125 - luminance control (UGR < 19) | | | | | | |
|---|-------------|----|------|-------------------|--------------|-----------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MB42 | 11 | 1100 | SLM neutral white | ELECTRONIC | LUMINANCE CONTROL |
| | MB43 | 13 | | SLM warm white | | |
| | MB44 | 11 | | SLM neutral white | DALI | |
| | MB45 | 13 | | SLM warm white | | |

| round version ϕ 212 - luminance control (UGR < 19) | | | | | | |
|---|-------------|----|------|-------------------|--------------|-----------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MB82 | 22 | 2000 | DLM neutral white | ELECTRONIC | LUMINANCE CONTROL |
| | MB83 | 24 | | DLM warm white | | |
| | MB84 | 41 | 3000 | DLM neutral white | DALI | |
| | MB85 | 44 | | DLM warm white | | |
| | MB86 | 22 | 2000 | DLM neutral white | DALI | |
| | MB87 | 24 | | DLM warm white | | |
| | MB88 | 41 | 3000 | DLM neutral white | INVERTER | |
| | MB89 | 44 | | DLM warm white | | |
| | MB90 | 22 | 2000 | DLM neutral white | ELECTRONIC | |
| | MB91 | 24 | | DLM warm white | | |
| | MB74 | 22 | 2000 | DLM neutral white | ELECTRONIC | |
| | MB75 | 24 | | DLM warm white | | |
| | MB76 | 41 | 3000 | DLM neutral white | DALI | |
| | MB77 | 44 | | DLM warm white | | |
| | MB78 | 22 | 2000 | DLM neutral white | DALI | |
| | MB79 | 24 | | DLM warm white | | |
| | MB80 | 41 | 3000 | DLM neutral white | DALI | |
| | MB81 | 44 | | DLM warm white | | |



| square version \varnothing 125 - luminance control (UGR < 19) | | | | | | |
|---|-------------|----|------|-------------------|--------------|-----------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MC00 | 11 | 1100 | SLM neutral white | ELECTRONIC | LUMINANCE CONTROL |
| | MC01 | 13 | | SLM warm white | | |
| | MC02 | 11 | | SLM neutral white | DALI | |
| | MC03 | 13 | | SLM warm white | | |

| square version \varnothing 212 - luminance control (UGR < 19) | | | | | | |
|---|-------------|----|------|-------------------|--------------|-----------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MC27 | 22 | 2000 | DLM neutral white | ELECTRONIC | LUMINANCE CONTROL |
| | MC28 | 24 | | DLM warm white | | |
| | MC29 | 41 | 3000 | DLM neutral white | DALI | |
| | MC30 | 44 | | DLM warm white | | |
| | MC31 | 22 | 2000 | DLM neutral white | | |
| | MC32 | 24 | | DLM warm white | | |
| | MC33 | 41 | 3000 | DLM neutral white | INVERTER | |
| | MC34 | 44 | | DLM warm white | | |
| | MC35 | 22 | 2000 | DLM neutral white | | |
| | MC36 | 24 | | DLM warm white | | |
| | MC19 | 22 | 2000 | DLM neutral white | ELECTRONIC | |
| | MC20 | 24 | | DLM warm white | | |
| | MC21 | 41 | 3000 | DLM neutral white | | DALI |
| | MC22 | 44 | | DLM warm white | | |
| | MC23 | 22 | 2000 | DLM neutral white | | |
| | MC24 | 24 | | DLM warm white | | |
| | MC25 | 41 | 3000 | DLM neutral white | | |
| | MC26 | 44 | | DLM warm white | | |



| round version ø 212 - double asymmetric | | | | | | |
|---|-------------|----|------|-------------------|--------------|-----------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MB66 | 22 | 2000 | DLM neutral white | ELECTRONIC | DOUBLE ASYMMETRIC |
| | MB67 | 24 | | DLM warm white | | |
| | MB68 | 41 | 3000 | DLM neutral white | | |
| | MB69 | 44 | | DLM warm white | | |
| | MB70 | 22 | 2000 | DLM neutral white | DALI | |
| | MB71 | 24 | | DLM warm white | | |
| | MB72 | 41 | 3000 | DLM neutral white | | |
| | MB73 | 44 | | DLM warm white | | |

| round version ø 125 - down light wall washer | | | | | | |
|--|-------------|----|------|-------------------|--------------|---------------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MB47 | 11 | 1100 | SLM neutral white | ELECTRONIC | DOWNLIGHT WALL WASHER |
| | MB48 | 13 | | SLM warm white | | |
| | MB49 | 11 | | SLM neutral white | DALI | |
| | MB50 | 13 | | SLM warm white | | |

| round version ø 212 - downlight wall washer | | | | | | |
|---|-------------|----|------|-------------------------|--------------|---------------------------|
| luminaires | code | W | lm | LED Fortimo | control gear | optic |
| | MB92 | 22 | 2000 | DLM neutral white | ELECTRONIC | DOWNLIGHT WALL WASHER |
| | MB93 | 24 | | DLM warm white | | |
| | MB94 | 41 | 3000 | DLM neutral white | | |
| | MB95 | 44 | | DLM warm white | | |
| | MB96 | 22 | 2000 | DLM neutral white | DALI | |
| | MB97 | 24 | | DLM warm white | | |
| | MB98 | 41 | 3000 | DLM neutral white | | |
| | MB99 | 44 | | DLM warm white | | |
| | MC41 | 24 | 2000 | SLM warm white IRC > 90 | ELECTRONIC | |
| | MC42 | 44 | 3000 | SLM warm white IRC > 90 | | |
| | MC43 | 24 | 2000 | SLM warm white IRC > 90 | DALI | |
| | MC44 | 44 | 3000 | SLM warm white IRC > 90 | | |

| accessories | code |
|---|-------------|
| Transparent protection screen IP64 ø 212 Colour 00 | MWR0 |

| accessories | ø 125 | ø 212 |
|-------------------------|-------------|-------------|
| Round rim Colour 15 | MWP4 | MWP5 |
| Square rim Colour 15 | MWQ8 | MWQ9 |